


Small Clamp Embroidery Hoop

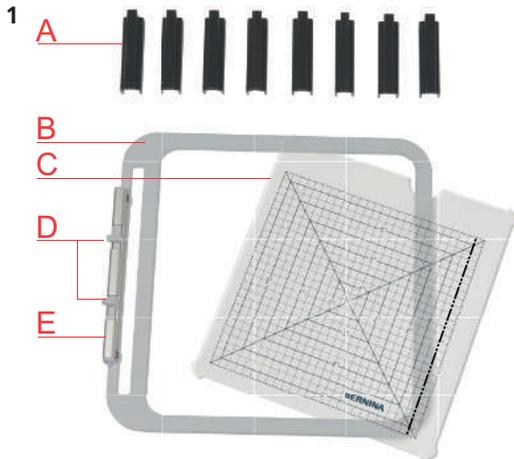

Information

Scope of Delivery

- 1× Embroidery Hoop
- 1× Embroidery Template
- 8× Clamp

Purpose

- To quilt in the hoop.

For Your Safety

Before using this accessory, please read this instruction manual as well as the instruction manual of your machine carefully.

Overview

- A Clamps
- B Hoop
- C Embroidery Template
 - Embroidery Field 8- and 7-Series (#26): 6.5 × 6.5" (165 × 165 mm)
 - Embroidery Field 5-Series (VIO) (#26): 6.25 × 6.5" (158 × 165 mm) - limited embroidery field on the right side
 - Embroidery Field 8-, 7- and 5-Series (VIO) (#43/44C): 6 × 6" (150 × 150 mm)
- D Push Button
- E Embroidery Hoop Connector

Application

Hooing the Fabric

- > Mark the center of the quilt block on the quilt sandwich.
- > Place the quilt sandwich on the hoop.
- > Place the embroidery template on the quilt sandwich. Make sure that the quilt sandwich does not get distorted.
- > Align the center of the quilt block with the center of the template.
- > Press the embroidery template firmly onto the quilt sandwich.
- > Position the first clamp on one side of the hoop. (Fig. 2)
- > Place second clamp on the opposite side. Position the third and fourth clamp on the other two sides. Place the remaining clamps on all sides. (Fig. 3)
- > Remove the embroidery template from the embroidery hoop.

4



Attaching the Hoop

- > Attach the slide-on table so that the embroidery hoop does not have to be removed from the machine when the quilt sandwich needs to be rehooped.
- > Attach the hoop. Refer to the instruction manual of the machine. To do this, pass the embroidery hoop at one corner of the embroidery hoop under the needle and the presser foot or temporarily remove one clamp. (Fig. 4)
- > Make sure that there is no fabric under the embroidery hoop.
- > Make sure that no additional fabric of the quilt sandwich comes into the embroidery area while embroidering. With large quilts, the right edge of the quilt sandwich should be rolled up and fixed in place.
- > Before using the embroidery hoop for the first time or if the needle position and the center of the embroidery hoop are not aligned, calibrate the embroidery hoop in the Setup Program of the machine. Refer to the instruction manual of the machine.
- > Select the embroidery hoop on the machine – «ClampS».
- > Open the embroidery design on the machine and make the desired amendments. **Please note:** Applications with CrystalWork are not suitable for this embroidery hoop.

Tips for Quilting

- > To prevent puckering and shifting, baste the quilt top and the backing fabric together before quilting.
- > Start quilting from the center.
- > To align the quilt blocks and the quilting motifs, use the embroidery template. To do this, realign the clamps.
- > Align the embroidery design. To do this, use the function «Check Embroidery Design Size» or, if available, the «Pinpoint Placement».
- > With large and heavy quilts, make sure that the weight of the quilt is supported on both sides of the hoop while the machine is stitching.

Rehooping the Fabric

When the slide-on table is attached, the quilt sandwich can be rehooped without removing the embroidery hoop from the machine.

- > Raise the needle and presser foot.
- > Position the embroidery hoop so that there is sufficient space for rehooping, e. g. move the embroidery hoop to the rear in the «Hoop Indicator/Select Hoop» (parking position).
- > Remove the clamps, rehoop and align the quilt sandwich. Place the embroidery template on the quilt sandwich from behind the machine.
- > Position the clamps.

Removing the Embroidery Hoop

- > Refer to the instruction manual of the machine.